

SYPLY FILM FACED PLYWOOD TEXTURES EXPANSION

SyPly CARAT

SyPly DIAMOND

SyPly HEXA

SyPly TRANSPORT

Application



TRANSPORT
ENGINEERING



SHIPBUILDING




PLAYGROUND
EQUIPMENT

Coated meshed plywood is user-friendly where increased durability and slip resistance are required



SYKTYVKAR PLYWOOD MILL

ADVANTAGES OF NEW TEXTURES

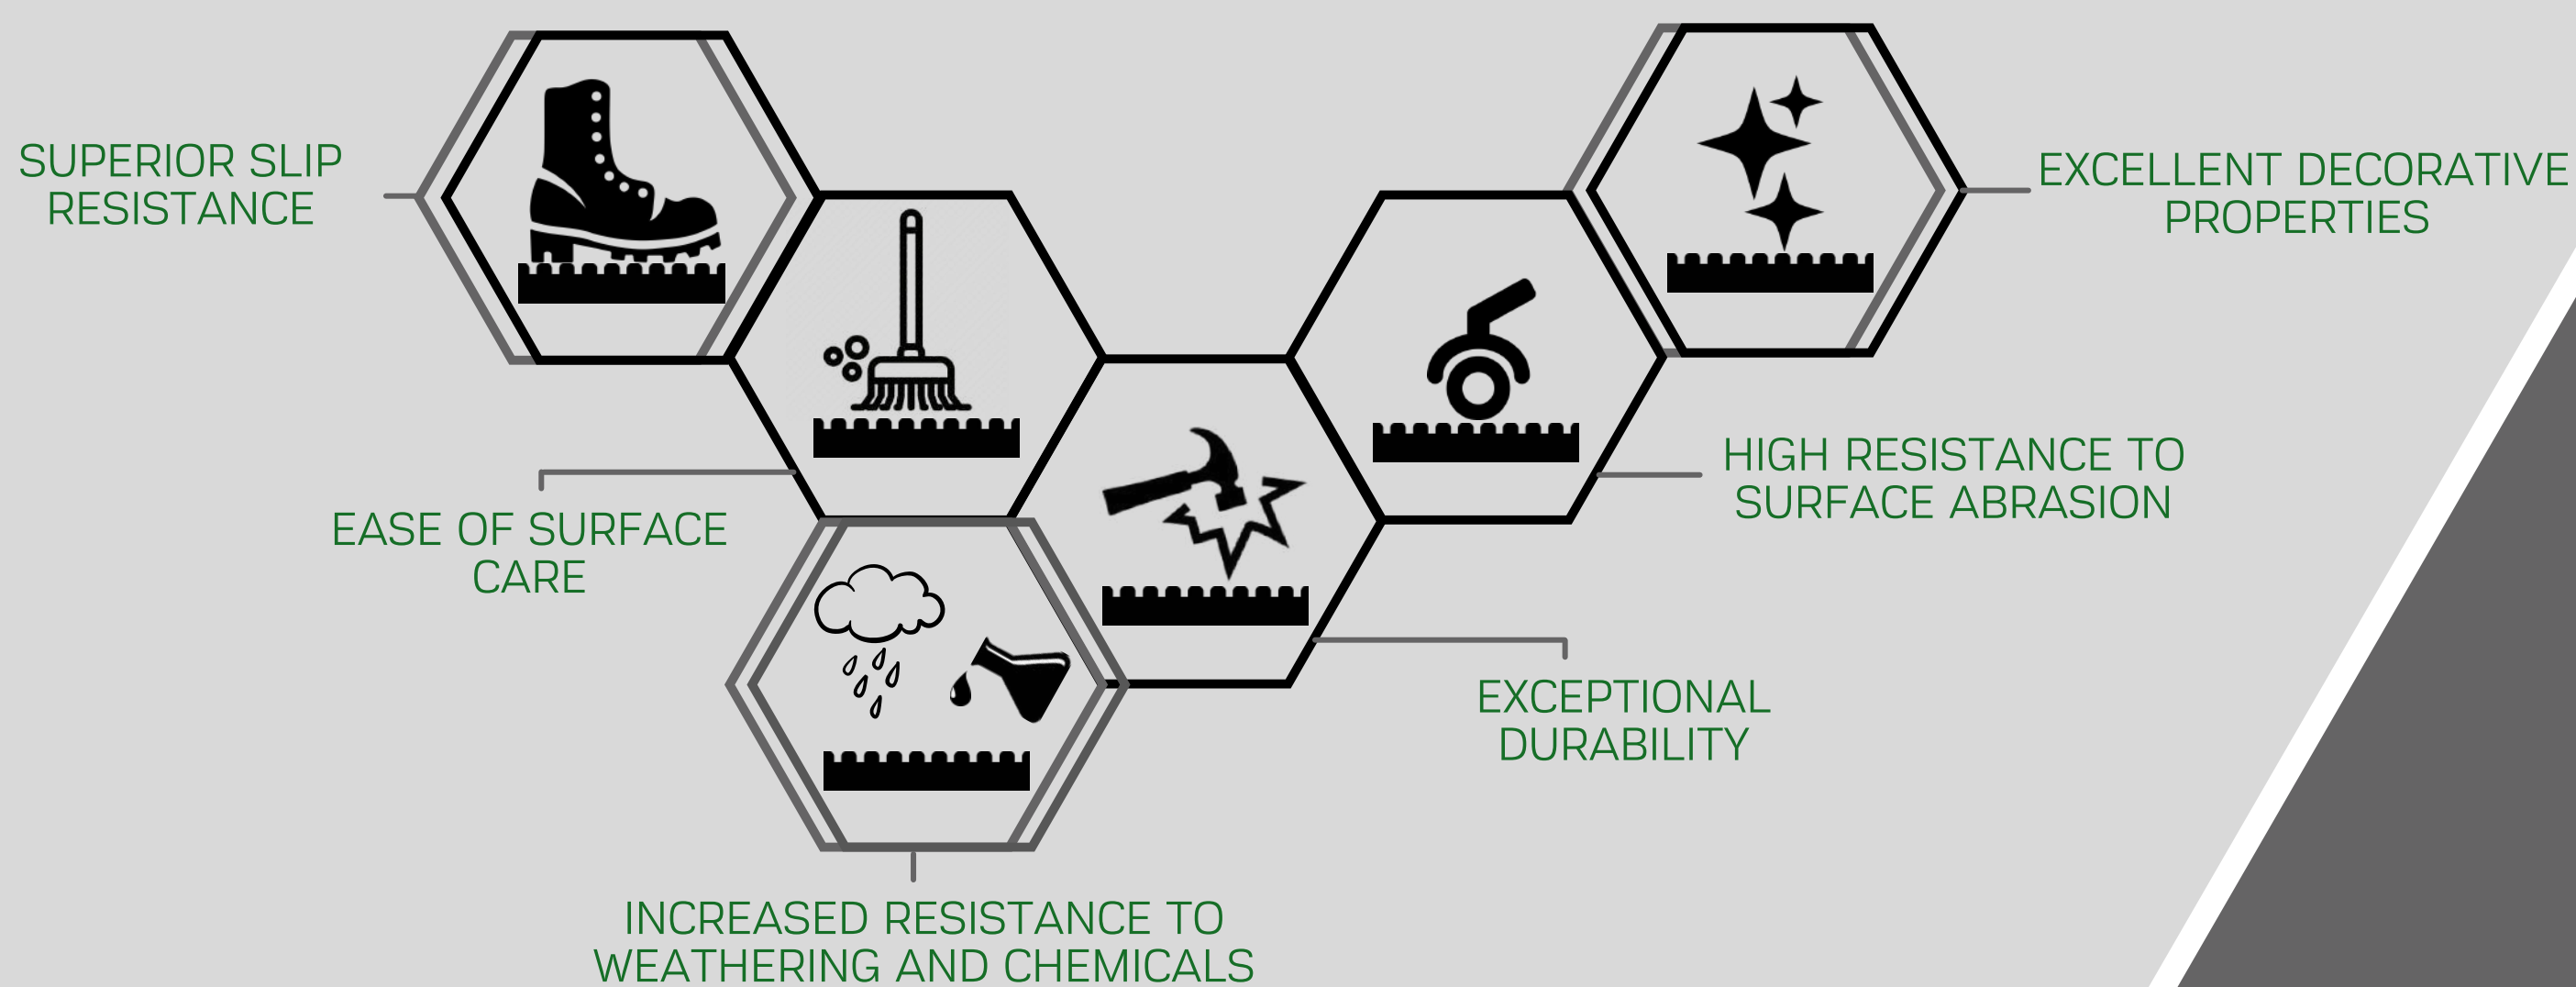

SPECIFICATIONS

Standard sizes, mm

2500x1250/2440x1220

Thickness, mm

6-35

Surface type

texture/smooth

Density, kg/m³

650-700

Glue type

WBP

Moisture content, %

5-10

Formaldehyde emission class

E1

Wear resistance of the film,
cycles in Taber abrasion test

350-600

Surface color

Dark Brown (120/120 g/m²; 120/220 g/m²)

Black (120 g/m²)

Grey (120 g/m²)

Other colors on request

SALES DEPARTMENT

www.syply.com

export@syply.ru

tel: (8212) 29-37-72